



RS 495 300
with fresh cooling
integrated, frame for decor panels,
top and side panels in stainless
steel

Ice and water dispenser, black
Niche width 91 cm
Niche height 178 cm

RS 495 310
with fresh cooling
freestanding, stainless steel fully
cladded

Ice and water dispenser, black
Width 91 cm, height 178 cm

RS 495 330
with fresh cooling
freestanding, aluminium fully
cladded

Ice and water dispenser, lightgrey
Width 91 cm, height 178 cm

Included in the price

- 1 egg holder with lid
- 1 activated charcoal filter
cartridge for integrated water
filter system

Special accessories

- DR 220 010**
Pressure regulator, tap water
pressure 6-10 bar, 3/4" connection
- RA 035 030**
Bottle cooler in aluminium
- RA 050 100**
Replacement activated charcoal
filter cartridge for integrated water
filter system
- RA 421 010**
Stainless steel door trim for
RS 495 300
- WF 040 020**
Descaling and neutralising filter.
- WF 040 021**
Filter cartridges
- Set of three filter cartridges.

Fridge-freezer combination **RS 495**

- Seven climate zones incl.
fresh cooling
- Cooling with automatic
humidity control
- Two beverage chillers
- Net volume 593 litres
- Integrated ice maker with fixed
inlet water connection
- Dispenser for ice cubes,
crushed ice and chilled water,
sensor controlled night light
- Energy efficiency class A

Handling

Electronic temperature control
with digital display.

Features

Energy-saving vacation mode.
Open-door and malfunction
system.
Top panel and ventilation grille in
stainless steel.

Cooling

Net volume 337 litres.
No-frost technology with fast
cooling.
Automatic defrosting with defrost
water evaporation.
Temperature adjustable from
+2 °C to +8 °C.
4 safety glass shelves, 3 of
which are height adjustable and
extendable.
2 humidity drawers for vegetables,
automatically and manually
controllable.
2 door racks, height adjustable.
1 door rack with transparent
front flap.

Fresh cooling

Net volume 49 litres.
Automatic defrosting with defrost
water evaporation.
Two separate beverage chillers,
height adjustable.
1 fresh cooling drawer, manually
controllable.

Freezing

Net volume 207 litres.
No-frost technology with fast
freezing.
Temperature adjustable from -
16 °C to -21 °C.
4-star freezer compartment.
Automatic defrosting with defrost
water evaporation.
Freezing capacity 12 kg/24 h.
Storage time after a
malfunction 5 h.
2 fully extendable freezer drawers.
4 door racks, 2 of which are height
adjustable.

Ice and water dispenser

Sensor controlled light that reacts
to daylight, can also be switched
on separately.
For large pitchers and sport
bottles.
Integrated in the freezer
compartment, with fixed inlet water
connection.
Can be switched off.
Ice cube production: approx.
2.5 kg/24 hrs.
Ice cubes and crushed ice.

Removable ice storage container
with approx. 4.4 kg capacity.
Ice water supply approx. 1.3 litres.
Integrated water filter with
saturation indicator.

Product rating

Energy consumption
1.625 kWh/24 h.


Planning notes



The large volume and the high
performance of the appliance
result in a higher noise level.
Wall recess of 20 mm necessary.
Decor panel measurements:
Top left door 355 x 462 mm.
Bottom left door
355 x 818 mm.
Door right 482 x 1699 mm.
Thickness max. 4 mm.
Front and back casters height
adjustable from the front by
19 mm.
The enclosed ventilation grille
must be used.
The socket and shut-off valve must
be planned outside of the niche.
Weight when empty 146 kg.

Connection


Total connected load 610 W.
Connecting cable 2.0 m with plug.
Water inlet.
Supply hose 3.0 m with 3/4"
connection.
Water pressure 2.4 to 6.9 bar.

RS 495 300

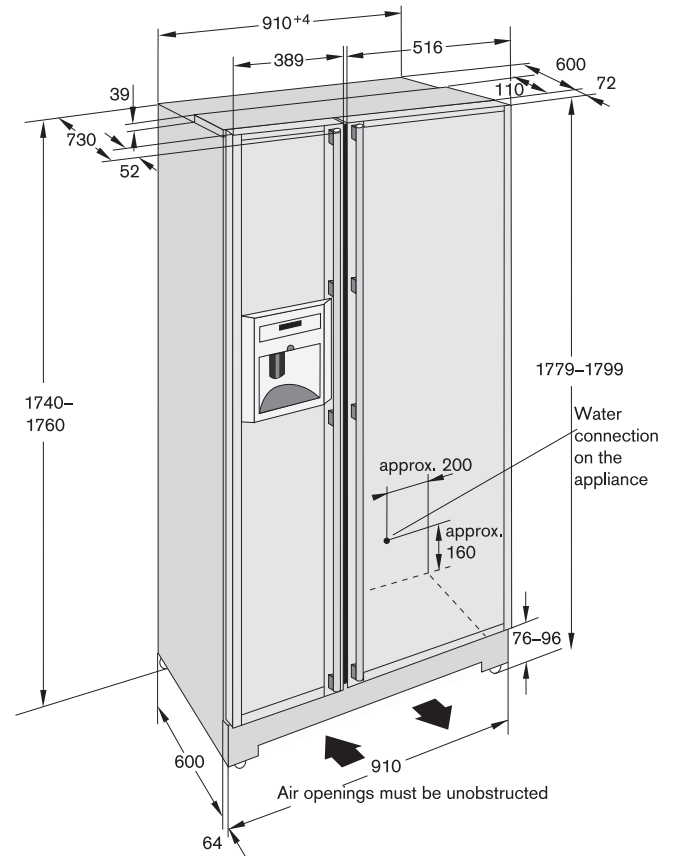


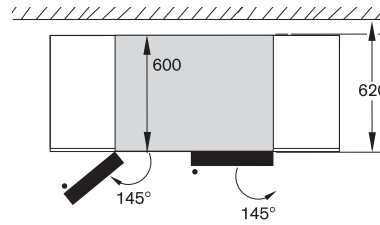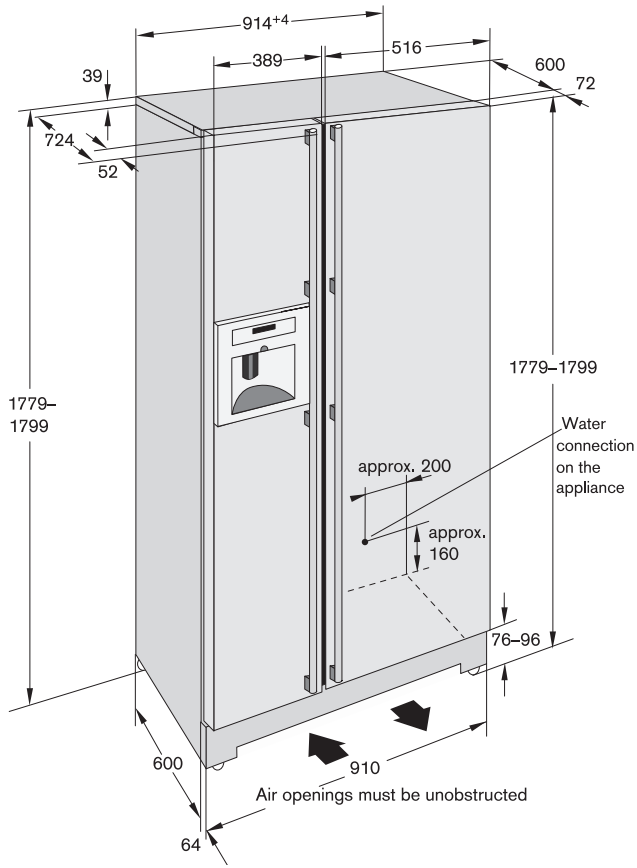

Door opens to 145° when the appliance is free-standing or integrated flush with the unit.

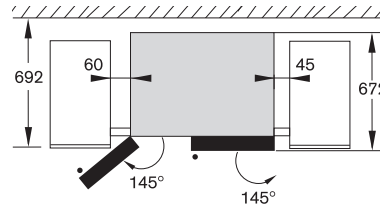

If fully fitted, a gap of 60 or 45 mm must be taken into account at the sides, so that the ice maker and slide-in drawers can be removed (intermediate panel on the exterior).



When fitted next to a side wall, a gap of 350 mm must be maintained on the left and 450 mm on the right, so that the slide-in drawers can be removed.